

C2600 SERIES

650-800 WATT AC/DC-DC/DC-BATTERY CHARGERS SINGLE OUTPUT

FEATURES

- DC input 18 - 380 V
- AC input 1 or 3-phase, 47 - 400 Hz
- DC output 5-290V
- Continuous short circuit protection
- Overvoltage protection with auto restart
- Industrial grade components
- Compact and robust design



DC/DC CONVERTERS


650W				800W					
		INPUT VDC					OUTPUT VDC		
18-36 VDC	OUTPUT AMPS	36-75 VDC	45-90 VDC	80-160 VDC	160-320 VDC	320-380 1) VDC	OUTPUT AMPS	ADJ.	RANGE
C 2620	85	C 2630	C 2640	C 2650	C 2670	C 2680 Z	100 a)	5	4.5 - 5.5
C 2621	65	C 2631	C 2641	C 2651	C 2671	C 2681 Z	75	9	8 - 10
C 2622	50	C 2632	C 2642	C 2652	C 2672	C 2682 Z	60	12	11 - 13
C 2623	42	C 2633	C 2643	C 2653	C 2673	C 2683 Z	50	15	14 - 16
C 2624	25	C 2634	C 2644	C 2654	C 2674	C 2684 Z	30	24	23 - 26
C 2625	22	C 2635	C 2645	C 2655	C 2675	C 2685 Z	27	28	26 - 30
C 2629	12	C 2639	C 2649	C 2659	C 2679	C 2689 Z	15	48	45 - 55
C 2626	10	C 2636	C 2646	C 2656	C 2676	C 2686 Z	12	60	58 - 68
C 2627	5	C 2637	C 2647	C 2657	C 2677	C 2687 Z	6.5	110	100 - 130
C 2628	2.5	C 2638	C 2648	C 2658	C 2678	C 2688 Z	3.2	220	200 - 250

AC/DC POWER SUPPLIES


800W						
INPUT VAC, 1-PHASE			INPUT VAC, 3-PHASE	OUTPUT AMPS	OUTPUT VDC	
115 ± 20%	230 + 15% - 20%	115 ± 20% 230 + 15% 20%	3X200 + 15% - 20%		ADJ.	RANGE
C 2660	C 2680	C 2690	C 2660 V	100	5	4.5 - 5.5
C 2661	C 2681	C 2691	C 2661 V	75	9	8 - 10
C 2662	C 2682	C 2692	C 2662 V	60	12	11 - 13
C 2663	C 2683	C 2693	C 2663 V	50	15	14 - 16
C 2664	C 2684	C 2694	C 2664 V	30	24	23 - 26
C 2665	C 2685	C 2695	C 2665 V	27	28	26 - 30
C 2669	C 2689	C 2699	C 2669 V	15	48	45 - 55
C 2666	C 2686	C 2696	C 2666 V	12	60	58 - 68
C 2667	C 2687	C 2697	C 2667 V	6.5	110	100 - 130
C 2668	C 2688	C 2698	C 2668 V	3.2	220	200 - 250

BATTERY CHARGERS


800W						
INPUT VAC, 1-PHASE			INPUT VAC, 3-PHASE	OUTPUT AMPS	OUTPUT VDC	
115 ± 20%	230 + 15% - 20%	115 ± 20% 230 + 15% 20%	3X200 + 15% - 20%		NOM. BATTERY VOLTAGE	RANGE
B 2661	B 2681	B 2691	B 2661 V	50	12	12 - 16
B 2662	B 2682	B 2692	B 2662 V	25	24	24 - 32
B 2664	B 2684	B 2694	B 2664 V	13	48	48 - 64
B 2666	B 2686	B 2696	B 2666 V	10	60	60 - 80
B 2667	B 2687	B 2697	B 2667 V	6	110	110 - 145
B 2668	B 2688	B 2698	B 2668 V	3	220	220 - 290

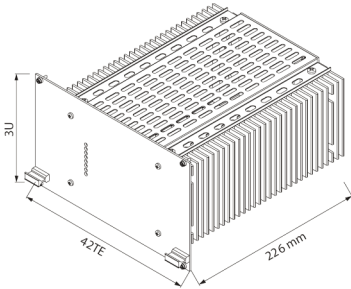

Eurocassette / approx. 4.0 kg
(pluggable module for 19" sub-rack)

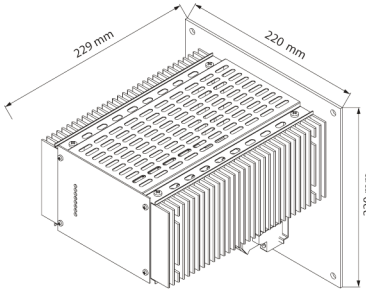

Wall mount / approx. 6.0 kg



NEW
Chassis mount / approx. 4.6 kg